

Stranka: Energetske rešitve

Projekt: TechUBi4.0

Naslov: Celica 6



Kontaktna oseba: Rakuš R

Model:

VERSO-R-2000-F-W/DHCW-R1-F7/M5-C5-SL/A

TEHNI NA SPECIFIKACIJA

Tipologija	NSPE		
	DPE		
Vrsta HRS	Rotacijski toplotni izmenjevalec		
Air handling unit data			
		Vtok	Odtok
Nominalna stopnja pretoka	[m³/h]	1345	1345
	[m³/s]	0,37	0,37
Nazivni zunanji tlak	[Pa]	300	300
Hitrost dotoka pri na rtovani stopnji pretoka	[m/s]	1,89	
SFPv	[kW/m³/s]	1,78	
The thermal efficiency of HRS	[%]	82	
Calculation data			
		Zima	Poletje
Design outdoor temperature	[°C]	-13	32
Outdoor relative humidity	[%]	90	45
Indoor temperature	[°C]	22	26
Indoor relative humidity	[%]	40	50
Atmosferski tlak	[Pa]	101325	
Gostota zraka	[kg/m³]	1,2	
Air handling unit location		Ljubljana,Slovenia	
Dry-bulb temperature (TdryS)	[°C]	31,9	
Wet-bulb temperature (TwetS)	[°C]	20,9	
Dew-point temperature (Tdw-pS)	[°C]	15,5	
Dry-bulb temperature (TdryW)	[°C]	-6,8	
Electrical data			
Number of electrical input		1	



AHU

 Electrical connection ~230V / 50Hz / 1-phase / 3x1,5mm² /6,3A

Avtomatsko krmiljenje

Tip	C5
Control panel	C5.1

COMMISSION REGULATION (EU) No 1253 (ecodesign requirements)

		Value	2018
The thermal efficiency of HRS, η_{nrvu} (EN308)	[%]	82	73
Internal specific fan power, SFP _{int}	[W/m ³ /s]	715	1317
Type of drive - variable speed		Installed	Necessary
Thermal by-pass facility		Exist	Necessary
Warning - filter is clogged		Exist	Necessary
Unit conformity assessment			Complies
Notranji padec tlaka prezraevalnih elementov ($P_{s, int}$)	[Pa]	408	
Notranji padec tlaka neprezraevalnih elementov ($P_{s, add}$)	[Pa]	21	
Effective electric power input of the fans (clean filter)	[kW]	0,66	

Osnovna sestava STANDART4

Paneli iz dveh pocinkanih ploevin, polnilo iz termo in zvo ne izolacije
požarno odporna miner. volna ($\lambda=0,036$ W/mK).

AHU painted C3 class, RAL 7035.

Indoor unit.

When filters gets dirty, unit control panel gives notice to change the filters.

Dirty filters cause increased energy consumption, which decreases performance and energy efficiency of the unit, so it is very important to change the filters regularly.

AHU shall operate with variable speed drive.

Instructions: www.komfovent.com/en/downloads

Thermal insulation class	T2
Thermal bridging class	TB2
Casing strength	D1 (M)
Filter bypass leakage	F9 (M)
Casing air leakage	L1(R)

Casing air leakage (Model Box, EN 1886)

-400 Pa (L1)	[dm ³ /(s·m ²)]	0,02
+700 Pa (L1)	[dm ³ /(s·m ²)]	0,21

Najveja stopnja zunanjega pušanja - 400 Pa (R)	[%]	< 1
Najveja stopnja zunanjega pušanja + 400 Pa (R)	[%]	< 1
Najveja stopnja notranjega pušanja ali prenos	[%]	2,5

AHU configuration

Debelina panela	[mm]	50
-----------------	------	----

Teža klimata

Teža (neto)	[kg]	280
-------------	------	-----

GLASNOST

Nivo zvo nega tlaka Lw	na kanale				v okolico	
	Pretok vto nega zraka [dB]		Pretok odto nega zraka [dB]		[dB]	
F[Hz]	Zajem	Izpuh	Zajem	Izpuh	Lw	Lp 3m
63	69,3	75,8	68,2	75,5	54,3	46,2
125	68,1	77,1	66,5	76,2	54,7	46,6
250	68,9	76,2	66,5	75,4	57,8	44,5
500	66,2	73,4	64,4	73,1	52,0	40,0
1000	60,8	69,3	59,2	69,1	42,3	32,8
2000	58,2	65,1	56,5	65,5	25,9	14,6
4000	53,7	61,0	52,1	62,1	22,0	11,8
8000	46,6	54,0	44,9	56,7	19,7	9,5
dB(A)	67	75	66	75	53	41

Rotacijski toplotni izmenjevalec
RR-AL-1000×120-SL-O-SN(1100×1100×420)-PN-A1-Z

Frekven nik	[kW]	0,096
-------------	------	-------

Kondenzacija

Designed for dry conditions

The velocity is too low, the result may be unreliable.

Preme	[mm]	1000×120
-------	------	----------

Višina vala	[mm]	1,4
-------------	------	-----

Gostota	[kg/m³]	1,2
---------	---------	-----

Heat recovery class (EN13053)	H1
-------------------------------	----

Efficiency bonus (E), (EU 1253)	273
---------------------------------	-----

		Zima		Poletje	
		Vtok	Odtok	Vtok	Odtok
Izkoristek temperature	[%]	82,1		82,1	
Izkoristek vlage	[%]	54,4		0	
Tla ni padec	[Pa]	45	45	45	45
Hitrost	[m/s]	0,97	0,97	0,97	0,97
Standardni zra ni pretok	[m³/h]	1345	1345	1345	1345

Zajem

Temperatura	[°C]	-13	22	32	26
-------------	------	-----	----	----	----

VERSO-R-2000-F-W/DHCW-R1-F7/M5-C5-SL/A

Datum: 8. 07. 2024

Relativna vlaga	[%]	90	40	45	50
Absolutna vlaga	[g/kg]	1,10	6,59	13,49	10,54
Enthalpy	[kJ/kg]	-10,34	38,88	66,72	53,02

Izpuh

Temperatura	[°C]	15,7	-6,7	27,1	30,9
Relativna vlaga	[%]	37	95	60	38
Absolutna vlaga	[g/kg]	4,09	2,03	13,49	10,54
Enthalpy	[kJ/kg]	26,17	-1,71	61,64	58,08

Povratek energije

Sensible heat	[kW]	13,0		-2,3	
Latent heat	[kW]	3,3		0,0	
Total heat	[kW]	16,4		2,3	
Recovery of moisture	[g/kg]	3,0	-4,6	0,0	0,0
OACF		1,07		1,07	

PRETOK VTO NEGA ZRAKA
Filter zraka

Filter correction (F), (EU 1253)		0
Tip	Panel air filter	
Energy efficiency class		
Air velocity class (EN13053)		V3
Razred filtra:		F7
Razred filtra (EN ISO 16890)		ePM1 60%
Dimenzije bxxhxl	[mm]	560x420x96
Število filtrov		1
Tla ni padec (nov filter)	[Pa]	46
Priporo eni max tla ni padec (EN 13779 2007)	[Pa]	190
Velocity in the AHU filter section	[m/s]	1,89

Vodni grelec zraka DHCW-355

HW-G10-03R-0473-0510-150-1x05C-24F-M1-C40-IS1-XX-1xR½/1xR½-150			
		Zima	Poletje
Kapaciteta	[kW]	9,9	3,0
Standardni zra ni pretok	[m³/h]	1345	1345
Hitrost	[m/s]	1,44	1,59
Tla ni padec	[Pa]	21	24
Temperatura zajema	[°C]	0,0	27,1
Rel. vlaga zajema	[%]	37	60

Outlet air temperature	[°C]	22,0	22,0
Rel. vlaga izpuha	[%]	0	77
Absolutna vlaga	[g/kg]	0,00	12,89

Medij		Voda	
Temperatura zajema	[°C]	45	9
Temperatura izpuha	[°C]	40	14
Notranji volumen	[dm³/h]	1723	521
Tla ni padec	[kPa]	36,86	3,98
Etilenglikol volumen	[%]	0	0

Tehni na specifikacija

Cevi		Baker
Plates		Aluminij
Volumen	[m³]	0,0024
Koristni prostor	[m²]	15,69
Razdalja med lamelami	[mm]	2,4
Rows		3
Circuits		5
Povezava vtoka	["]	1×R½
Povezava iztoka	["]	1×R½
L	[mm]	150
B	[mm]	590
H	[mm]	590
Omejitve		
Max hidravli ni tlak	[bar]	21
Max temperatura medija	[°C]	130

Ventilator EC

Premier kolesa	[mm]	280
Zra ni pretok	[m³/h]	1345
Built-in loss	[Pa]	146
Stati ni tlak	[Pa]	537
Hitrost	[1/min]	2363
Max. speed	[1/min]	2900

Motor efficiency class		IE4 (Super Premium)
Motor power	[kW]	0,66
Input current	[A]	1,6

Electric power to motor (clean filters)	[kW]	0,35
SFPv	[kW/m³/s]	0,95
Total fan efficiency	[%]	58,35
Static fan efficiency	[%]	57,32

PRETOK ODTO NEGA ZRAKA





Filter zraka

Filter correction (F), (EU 1253)		0
Tip	Panel air filter	
Energy efficiency class		
Air velocity class (EN13053)		V3
Razred filtra:		M5
Razred filtra (EN ISO 16890)		ePM10 50%
Dimenzije bxhxl	[mm]	560×420×96
Število filtrov		1
Tla ni padec (nov filter)	[Pa]	30
Priporo eni max tla ni padec (EN 13779 2007)	[Pa]	170
Velocity in the AHU filter section	[m/s]	1,89

Ventilator EC

Premier kolesa	[mm]	280
Zra ni pretok	[m³/h]	1345
Built-in loss	[Pa]	96
Stati ni tlak	[Pa]	471
Hitrost	[1/min]	2240
Max. speed	[1/min]	2900
Motor efficiency class		IE4 (Super Premium)
Motor power	[kW]	0,66
Input current	[A]	1,4
Electric power to motor (clean filters)	[kW]	0,31
SFPv	[kW/m³/s]	0,83
Total fan efficiency	[%]	58,69
Static fan efficiency	[%]	56,76

We reserve the rights to change technical data of the products in the process of their improvement without advance notice. Validity period of presented data - 1 month

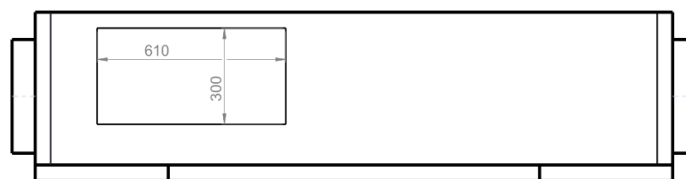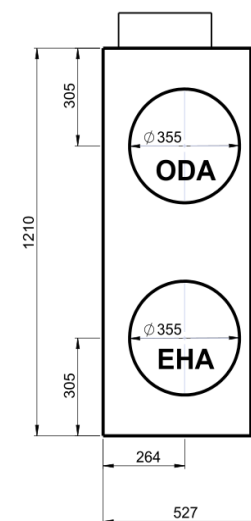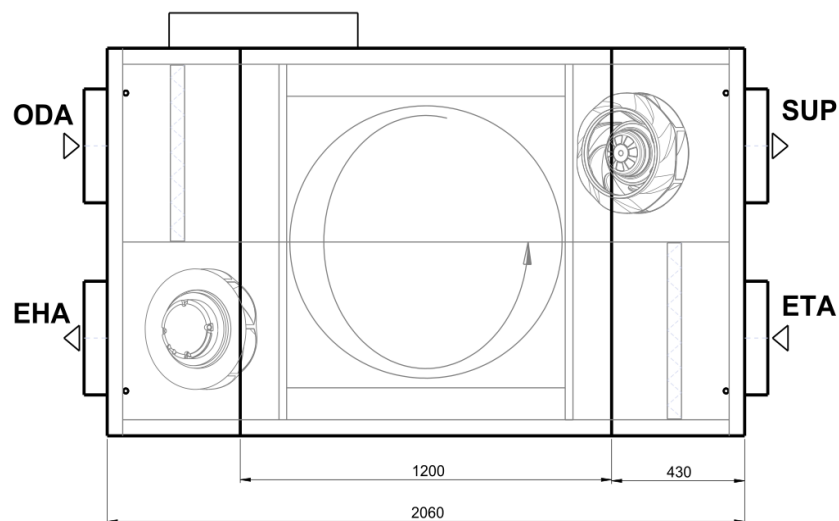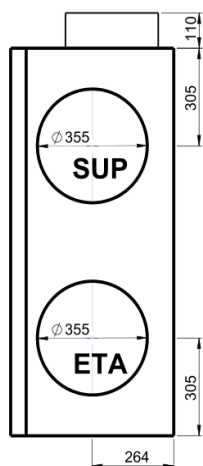

ODA - Outdoor air;
SUP - Supply air;
ETA - Extract air;
EHA - Exhaust air;
CB - Control box;

